

ATEX Ethernet



P-Ex 1000 Series Switches and Media Converters

The P-Ex 1002MC, P-Ex 1003GX2 and P-Ex 1005TX Ethernet switches and media converters are used as stationary devices in potentially explosive atmospheres of device Groups I and II. They are used to transfer optical or electrical data signals with a maximum bandwidth of 1 Gbit/s. The products are available in two different models, with aluminum housing for use in Zone 1 and 21 and the stainless steel housing for use in the mining area M2 or in harsh environments like offshore or chemical industry.


Key Features

- Installation in ATEX Zone 1 and Zone 21 as well as M2
- No additional protective housing needed
- Connect additional devices easily
- Operating temperature -40°C to +80°C
- All fiber optic ports are op is compliant (EN 60079-28)
- op is fiber optic connections up to 10 km
- Built fiber optic ring topologies in ATEX zones

Explosion protection (e.g. P-Ex 1002MC)

- Mining M2:
 - Ⓜ I M2 (M1) Ex eb qb [op is] I
- Gas Zone 1:
 - Ⓜ II 2(1)G Ex eb qb [op is] IIC T4
- Dust Zone 21:
 - Ⓜ II 2(1)D Ex tb [op is] IIIC T135°C IP64

Fully op is compliant ATEX Ethernet for Zone 1

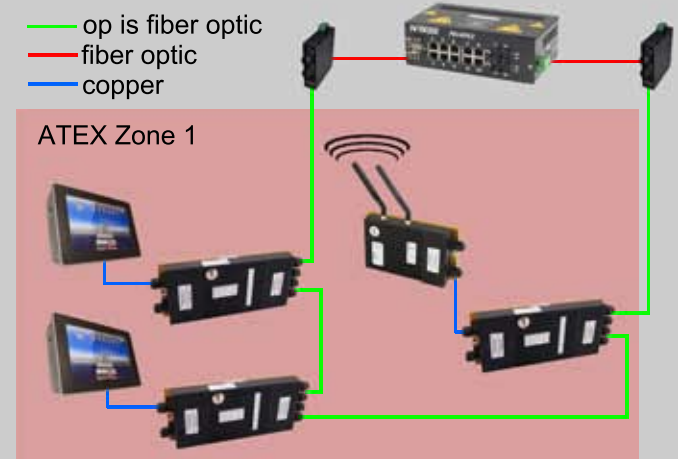

Orbitica

contact@orbitica.com
+33 56 22 43 17 6

Safety. Solution. Reliability.

www.orbitica.com